

Improve Stripper Well Performance
Through Micro-Pumping

*The Rhino MiniJack™ recovers oil economically
from stripper wells without overpumping*

RHINO MINI JACK™ ELECTRIC PISTON PUMP

Model 1000



**Unique,
Electric
Top-Head
Drive Motor
and Actuator**



**Customizable
Downhole Pump**

High-strength, low-friction traveling valve and stainless steel pump barrel with standing valve, plus stainless steel check ball and seat provide for long pumping life

Description

The Rhino MiniJack™ Electric Piston Pump Model 1000 is powered by electricity. The control motor is located at surface grade for easy installation and maintenance. Power to the pump is direct from grade through the sucker rod assembly. The pump recovers oil from a standard diameter well casing, to depths of 1,500 feet with a 3-hp motor and 3/4-inch rod. The fluid inlet is located at the bottom of the pump barrel and removes product to 0 submergence depth. The pump can be made explosion proof, meeting Class 2, Div. 1 requirements.

Flow Range
0-15 bbl/day
Operational Depth
1,500 Ft. with 3-hp motor & 3/4" rod
Standard Oil Well Casing Size
2 7/8" oil well tubing

Performance and Technical Data

Performance

Operational Depth	1,500'
Flow Range at 30 Hz, 3/4" rod; 12.5" limit switch separation	0-15 bbl/day
Motor	3-hp
Power Supply	230 Volt Single Phase or 230 or 460 Volt Three Phase
Maximum Lift	1,500 feet of water; variable speed (stroke) control adjusts to well conditions

Technical

Stroke Length	15"
Maximum External Diameter	2.9"
Total Cylinder Length	60"
Standard Oil Well Tubing	2 7/8"
Connection to Sucker Rod	7/16" - 20
Recommended Internal Diameter of Well Bore	4" or greater diameter
Standard Oil Well Discharge Head	
Driver Weight	120 lbs.
Driver Rod and Weight	3/4" Rod, 24 lbs./100'
Standing Valve Assembly Weight	8 lbs.

Improve Stripper Well Performance Through Micro-Pumping

The Rhino MiniJack™ recovers oil economically from stripper wells without overpumping

RHINO MINI JACK™ ELECTRIC PISTON PUMP

Model 1000

Materials of Construction:


(Materials of construction can be modified to meet specific applications)

Above Ground


Drive Motor	Stainless Steel/ Aluminum
Stuffing Box	Delrin®/Brass
Seal Plate Seals	Nitrile/ Viton
Landing Plate	Stainless Steel 2" NPT Male Thread
Standard Oil Well Head	

Downhole

Drive Rod	Fiberglass 3/4"
Drive Rod Connector	Stainless Steel
Traveling Valve Seal	Nitrile/Viton
Traveling Valve Check Ball	Stainless Steel
Traveling Valve	Brass
Traveling Valve Cylinder	Stainless Steel
Standing Valve Check Ball	Stainless Steel
Standing Valve	Stainless Steel Seat and Check Valve

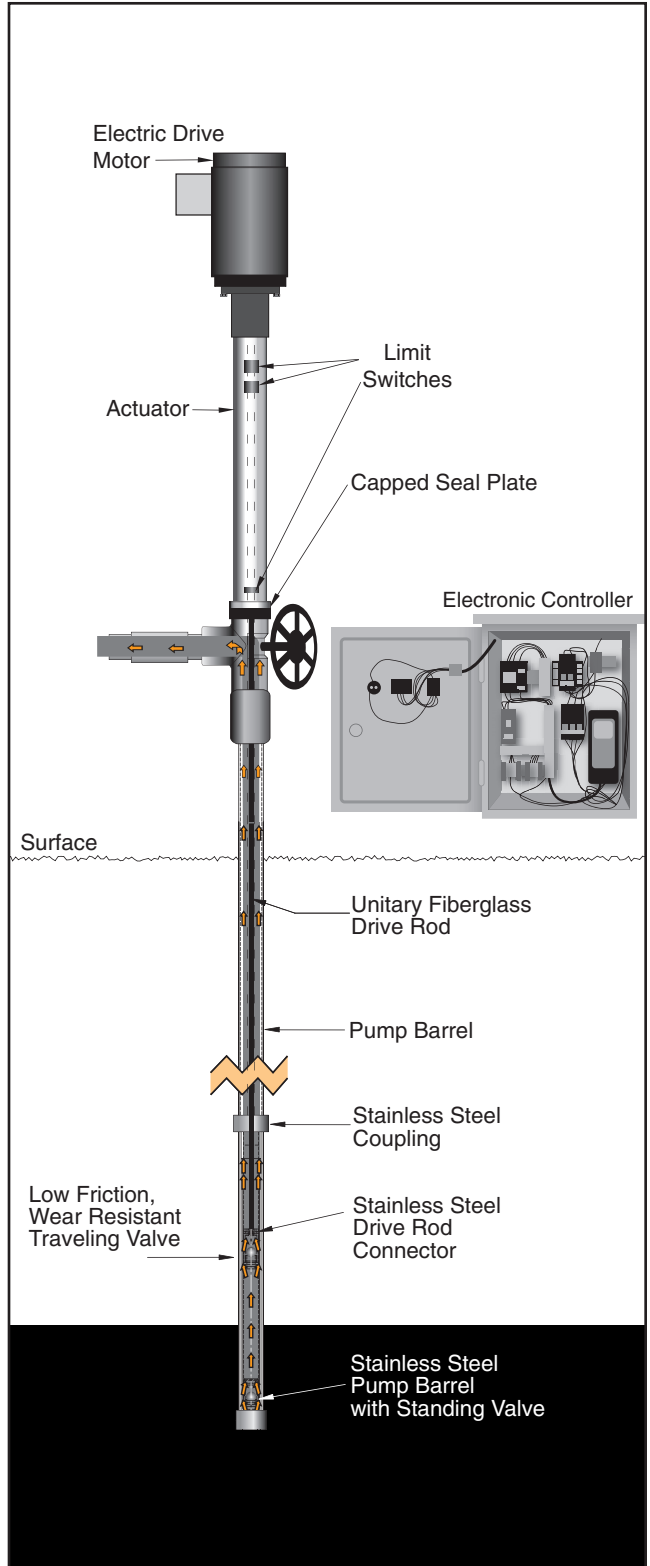

Rhino MiniJack 1000 TDH Vs. Backpressure

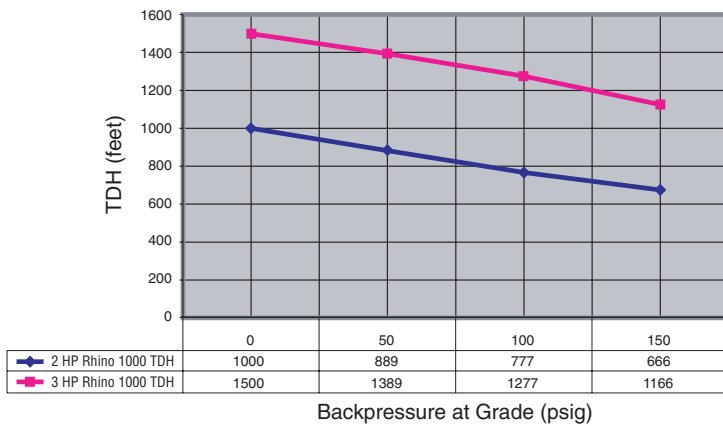

Dimensions (in inches)

Driver Height	48"
Driver Diameter	10"
Standing Valve Length	60"

Available Options

- ✓ Level Control Systems
- ✓ Metered Flow Control
- ✓ Flow Measurement
- ✓ Variable Frequency Drive
- ✓ SCADA Capability